


Front of Transformer **12' min.** clearance from any obstructions

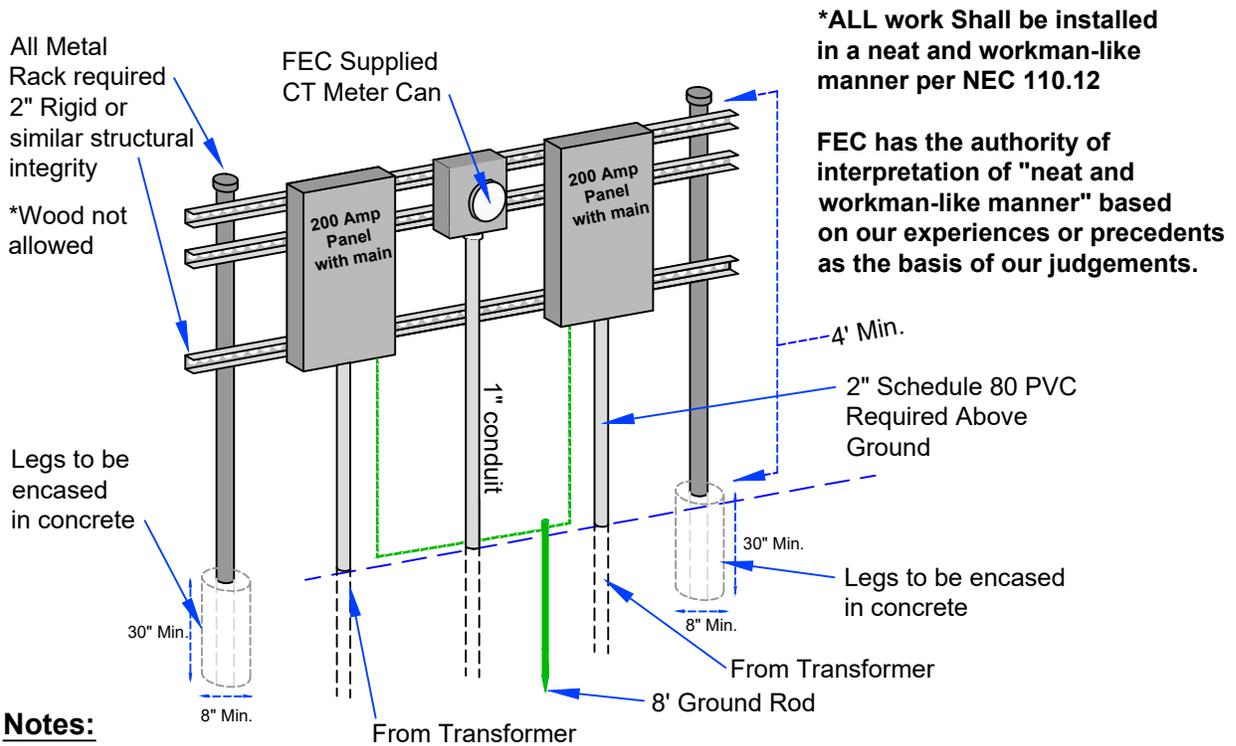

Notes:

1. Members are responsible for rack, panels, ground rod, & mounting of the meter socket along with the wire back to the transformer. FEC provides wire for metering.
2. If the rack is within 6' of the transformer, a 4th wire (which shall be a **#6 Ground Wire**) will need to be run back to the transformer from the panel.
3. For 200 Amp service **#2/0 Copper Wire** or **4/0 Aluminium** shall be used, a reduced neutral is acceptable.
3. FEC will take care of the metering but Electrician is asked to mount the FEC supplied metering can & run the 1" conduit back to the transformer
4. Rack shall be within 50' of the transformer, and if within sight, may be mounted on a home or structure.

DATE: 3/20/2025



**Single Phase - 400 Amp Service - Underground
Meter Rack & Preform Underground Transformer Pad**

Phone

(979) 968-3181 1-866-968-3181

MS-41