


WIRE SIZE	BREAKER SIZE	CONDUIT SIZE
#6 CU	60 Amp	1 inch
#4 CU	100 Amp	1 1/4 inch
#2 CU	125 Amp	1 1/4 inch
#1/0 CU	150 Amp	2 inch
#2/0 CU	200 Amp	2 inch
Call office	Over 200 Amp	Call office

Members May use One Size Down For Neutral Wire.



DATE: 3/20/2025

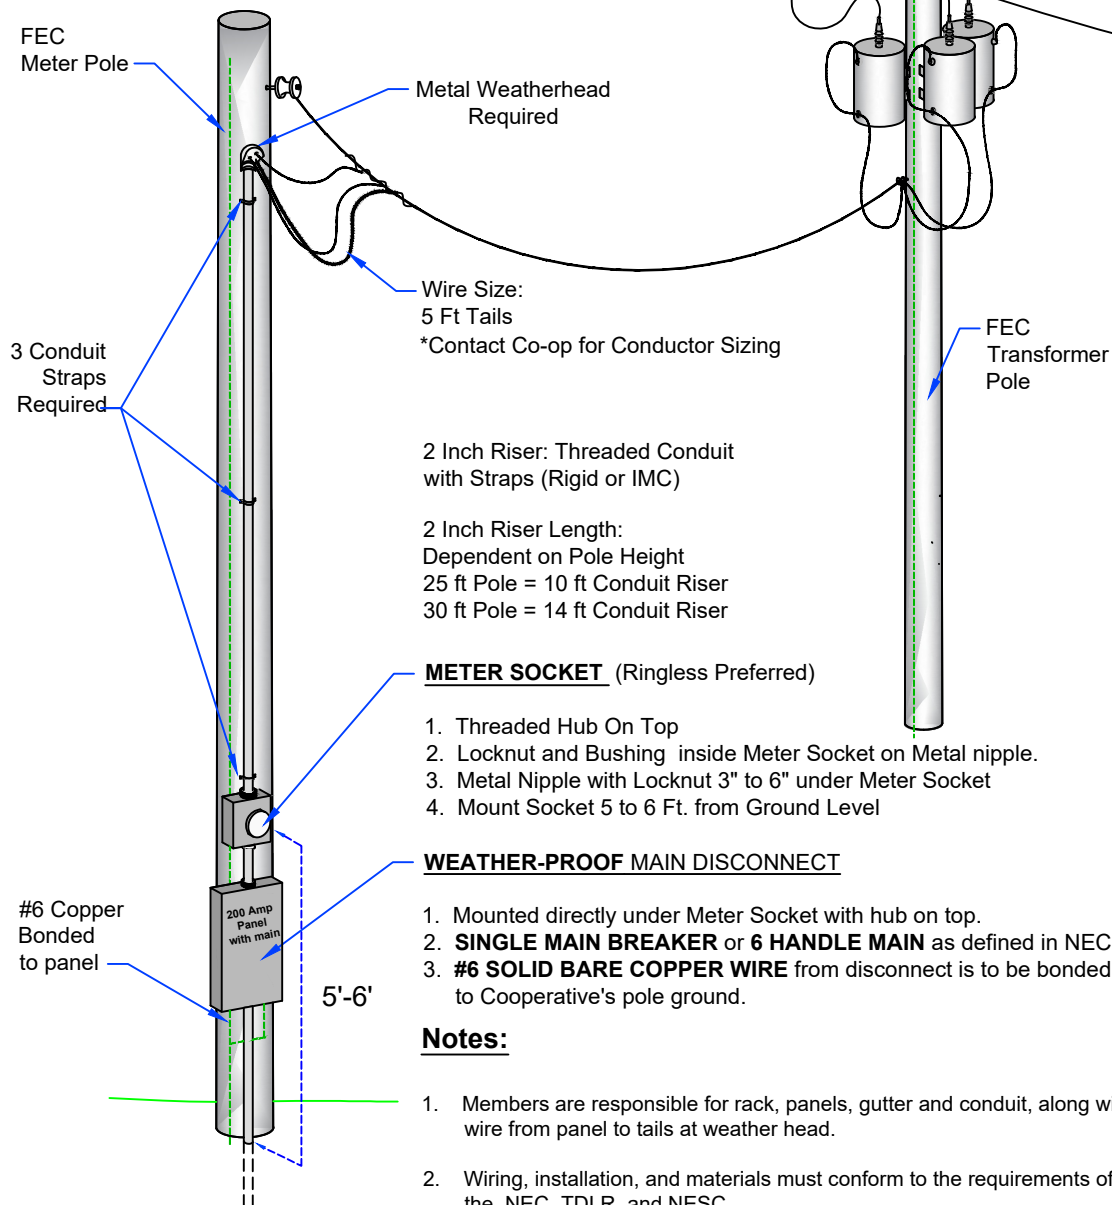

Three Phase 200 Amp Service - on Meter Pole - 120/208 & 120/240

Phone

(979) 968-3181 1-866-968-3181

MS-50